



MULTILIFT

MULTILIFT OPTIMA 25S




BASIC DATA



MULTILIFT OPTIMA 25S BASIC DATA

Type	OPTIMA 25S							
Vehicle type	4 axle							
GVW of the vehicle (t)	32							
Capacity (t)	25							
G-length	46	51	53	56	56S	59	61	63
System weight (kg) *	2290	2380	2470	2500	2500	2530	2550	2590
Tipping angle (°)	50	49	53	53	49	53	49	46
Max. operating pressure (MPa)	31,5							
Recommended oil flow (l/min)	100							

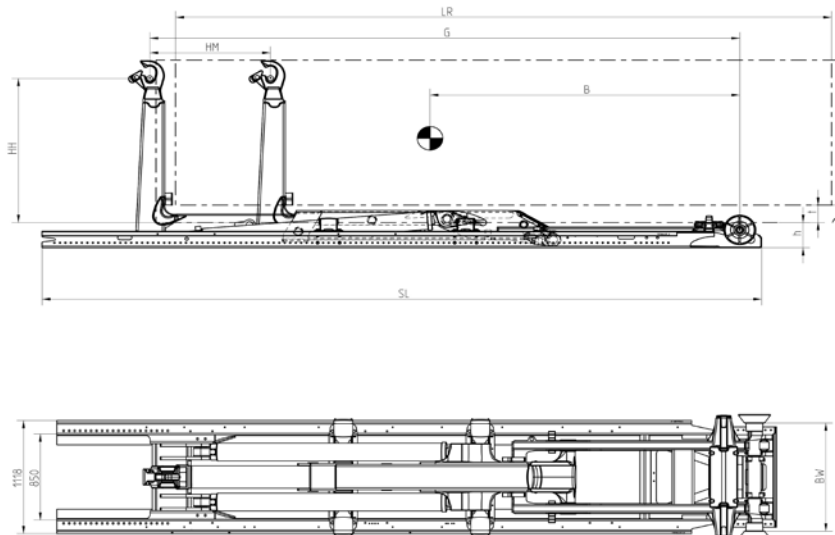

Primary dimensions

Model	OPTIMA 25S.46	OPTIMA 25S.51	OPTIMA 25S.53	OPTIMA 25S.56	OPTIMA 25S.56 S	OPTIMA 25S.59	OPTIMA 25S.61	OPTIMA 25S.63
LR = Body length (min - max) (m) internal	3,9 - 5,6	4,2 - 6,1	4,5 - 6,4	4,5 - 6,6	4,7 - 6,6	4,6 - 6,9	4,8 - 7,1	5,1 - 7,3
SL = Subframe length (mm)**	5333	5933	6563	6563	6283	6563	6733	6883
B = Centre of gravity (mm)	2450	2700	2850	2950	2950	3000	3150	3300
G = Exact G-length (mm)***	4580	5080	5360	5560	5580	5860	6080	6310
HM = Horizontal movement (mm)	900	1100	1100	1300	1100	1450	1450	1450
h = Installation height (mm)	250							
t = Min free tunnel height (body) (mm)	125							
HH = Hook height (mm)	1570							
BW = Body width (mm)	1070							

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data is not always in accordance with the latest version or standard model in production. The models in pictures may represent special equipment or colours.

